


KP290 功率型被漆插脚式线绕电阻器 2W-8W

KP290 Power Pinned Welding Chip Wire Wound Resistors 2W-8W

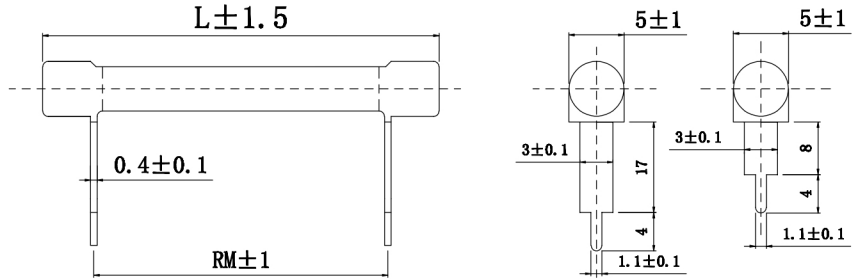

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高精度 - 低温度系数
Close tolerances - Low T.C.R
- 可提供安装套件 (选购件)
Installation packages (options)

应用范围 Applications

- 仪器、仪表
Meters and instruments
- 适用于功率电源
Applied for functional power supply
- 变频电源等领域
Variable frequency power source etc
- 各类电子产品
Various of electrical devices

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range (Ω)	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)	
				L	RM
KP290	2	1R-1K	±5% (J) ±10% (K)	18.2	10.2
	4	1R-1K		23.3	15.2
	5	1R-2K		33.4	25.4
	6.5	1R-2K		43.5	35.4
	8	1R-2K		53.7	45.7

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
KP290-0/1	8W	51R	±5%